


Switched interlocked sockets – for wall mounting

mechanical interlock, lockable by padlock

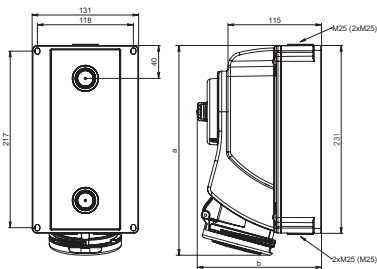


Switched interlocked socket – wall mounting

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	249	249	249	259	259	259
b	153	153	153	153	153	153
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm ²]	1,5-2,5			2,5-6		
solid [mm ²]	1,5-4			2,5-10		
Weight [g]	1067	1072	1118	1123	1136	1183

- with screw terminals
- housing material: PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- top, bottom or rear entry
- incl. threaded bung

IP44 splashproof

* Option: M32 or closed

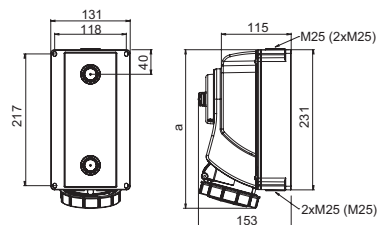

Switched interlocked socket – wall mounting


Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	251	251	253	260	260	262
b	153	153	153	153	153	153
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm ²]	1,5-2,5			2,5-6		
solid [mm ²]	1,5-4			2,5-10		
Weight [g]	1130	1150	1190	1210	1220	1270

- with screw terminals
- housing material: PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- top, bottom or rear entry
- incl. threaded bung

IP66/67 watertight

* Option: M32 or closed

Advantages:

- stable design for wall mounting
- mechanical interlock:
 - after plugging and switching-on plug is locked
 - after switching-off and unplugging switch is locked
- all components are mounted on bottom
- large connecting area
- ready wired for connection
- for 16A and 32A wiring-through
- at switch-off position: lockable by padlock (40mm) 

110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	440V~ 60Hz 3h
Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

Amp.	Poles	pack. unit	110V~ Cat.No.	230V~ Cat.No.	400V~ Cat.No.	500V~ Cat.No.
16	3	1	7513-4	7513-6	7513-9	7513-7
16	4	1	7514-4	7514-9	7514-6	7514-7
16	5	1	7515-4	7515-9	7515-6	7515-7
32	3	1	7523-4	7523-6	7523-9	7523-7
32	4	1	7524-4	7524-9	7524-6	7524-7
32	5	1	7525-4	7525-9	7525-6	7525-7



7525-6

Amp.	Poles	pack. unit	110V~ Cat.No.	230V~ Cat.No.	400V~ Cat.No.	500V~ Cat.No.	440V~ Cat.No.
16	3	1	75132-4	75132-6	75132-9	75132-7	
16	4	1	75142-4	75142-9	75142-6	75142-7	
16	5	1	75152-4	75152-9	75152-6	75152-7	
32	3	1	75232-4	75232-6	75232-9	75232-7	
32	4	1	75242-4	75242-9	75242-6	75242-7	75242-3
32	5	1	75252-4	75252-9	75252-6	75252-7	



75252-6

■ ■ ■ Technical data:

- switched interlocked socket
- 16A and 32A 3-, 4- and 5 poles
- IP44 and IP67
- **ON/OFF switch PCE-Merz ML0; EN 60947-3; AC22A, 10kA**
- large connection area
- enclosure made of shock-resistant thermoplastic material
- approved acc. to EN60309, ÖVE

Information icons: i, socket, plug, PD, safety, microphone, calculator, game controller, lightbulb, car, #