



SUPERIOR RELIABILITY AND SAFETY

PRODUCT CATALOG
POWER DISTRIBUTION

2023/06

CONTRIK[®]

A brand of the Neutrik Group



CONTRIK® is a brand of the Neutrik Group and a provider of professional power distribution systems, equipotential bonding systems and premium power cables.

We are proud to offer outstanding products and make it our business to develop innovative and sustainable systems for our customers.

You as customer as well as your safety in all situations, are our top priority!

High quality standard



- Profound design expertise and high-quality manufacturing in the European Union
- High quality electrical and electronical components from the renowned brands
- EASYLEN® – unique and high-quality housing material :
 - Flame retardant acc. to UL94-V2
 - High temperature resistance
 - Corrosion insensitive
 - Not conductive
 - High protection from mechanical impact (up to IK10+)

PORTFOLIO OVERVIEW

Active



Power Container **XO**



Power Turtle **XO**



Power Rack **X**

Passive



Power Turtle **XO**



Power Strip **XO**



cPot equipotential bonding system **XO**



Power cables

Features & benefits

- Power distribution portfolio for harsh and demanding stage applications
- Passive (without circuit breakers) and active (with circuit breakers) distribution solutions
- Unique advantages of EASYLEN® housing material
- Thought through housing concepts ensure high protection, easy handling and transport
- High mechanical protection (IK) and high environmental protection (IP)



Xtreme

High mechanical protection (IK)



Xtreme Outdoor

High mechanical (IK) and environmental protection (IP)

Power Container Xtreme Outdoor (XO) CPC*

Power Container is a highly reliable, rugged and first level powerful distribution solution. The Power Container allows reduction of cabling effort & cost, circuit protection and power measurement. It is ideally suited for demanding mobile applications esp. video walls, lighting, and others.

- **High durability & protection:** rugged EASYLEN® housing with high IK, IP44 with CEE / cPot in mated condition, self-closing caps, connector protection, flame retardant & non-conductive housing material
- **Reduction of cabling volume and effort** due to 2 x Harting E16 Multipin Outs
- Easy transport & handling: compact, stackable, fully lockable, integrated handles
- Minimization of failure impact on the event. Due to separate protection of each Out channel against overload



CPC32-C1-H2-CB



CPC63-C1-H4-CBM



PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
CPC32-C1-H2-CB	<p>Front. LED mains monitor L1, L2, L3 (after MS); Protection (under self-closing protective windows): 1 x RCCB 40/0.03A with 13 x MCB C16.</p> <p>Back. In: CEE 32 A 5-pin plug connector, red; Out: 2 x Harting attachment socket HanE 16-pin (6 channels, assignment 1-9) with sealing cap, 3 x powerCON® TRUE1® built-in socket self-closing caps, cPot earth connection. Housing made of flame-retardant, impact-resistant EASYLEN® with leather grain; Structure similar to protection class II, IP44, stacking rails at the top, foot runners, folding handles on the side. Dimensions (W/T/H): approx. 395 x 295 x 405 mm</p>	1028846
CPC63-C1-H4-CBM	<p>Front. 1 x main switch 4-pin; LED mains monitor L1, L2, L3 (after HS); 1 x measuring device Janitza UMG96-S, 3-wire, Modbus interface, (in front of HS); Fusing (under self-closing protective windows): 25 x RCBO C16/0.03A.</p> <p>Back. In: CEE 63 A 5-pin plug connector, red; Out: 4 x Harting HanE 16-pin panel socket (6 channels, assignment 1-9) with sealing cap, 3 x 3 x powerCON® TRUE1® panel socket self-closing caps, cPot ground connection. Housing made of flame-retardant, impact-resistant EASYLEN® with leather grain; Structure similar to protection class II, IP44, stacking rails at the top, foot runners, folding handles on the side. Dimensions (W/T/H): approx. 395 x 295 x 405 mm</p>	1028226

Power Turtle Xtreme Outdoor (XO) CPT-C2-T6-CB



CPT-C2-T6-CB

XO

Power Turtle Active is a rugged compact distribution box which features separate circuit protection against the overload (MCB) for of each Out, and popular CEE32A connector for input & daisy chain. It is ideally suited for outdoor usage and demanding mobile applications. 1 x CEE32A In – 6 x NEUTRIK® powerCON® TRUE1® TOP Out, 6 x MCB circuit breakers.

- **High power capacity** thanks to the CEE32A connecto
- **High durability & protection:** rugged EASYLEN® housing with high IK, high IP with CEE connector in mated condition, self-closing caps, flame retardant & non-conductive housing material
- **Versatile mounting options:** pegs, suspension, truss clamp
- **Circuit protection** against overload for each of 6x Outs with separate MCB
- **Easy transport & handling:** stackable with other Power Turtles, lightweight, fully lockable

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CPT-C2-T6-CB	IN: 1 x CEE32, Daisy Chain: 1 x CEE32, OUT: 6 x powerCON T1 TOP, Circuit protection: 6 x MCB (1-pole)	1028847

Power Turtle Multicore CPTM-*

Power Turtle Multicore are extremely rugged compact distribution boxes which allow significant reduction of the cabling volume, effort and cost due to the multicore input. It is ideally suited for outdoor usage and demanding mobile applications.

- **Reduction of cabling volume and effort** due to Harting E16 multipin connectors. And Even more reduction of cabling due to the versions with 12 x Outs
- **Very compact design:** flat design, lateral connector arrangement, applications with restricted space.
- **Versatile mounting options:** pegs, suspension, truss clamp
- **High durability & protection:** Rugged EASYLEN® housing with high IK, IP65 with Harting E16 in mated condition, self-closing caps, lateral connector arrangement, flame retardant & non-conductive housing material
- **Easy transport & handling:** stackable with other Power Turtles, lightweight, fully lockable



CPTM-H1-T6



CPTM-S1-T6



CPTM-H1-T12



CPTM-S1-T12



PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
CPTM-H1-T12	IN: 1 x Harting E16; OUT: 12 x powerCON® TRUE1® TOP	1028848
CPTM-S1-T6	IN: 1 x Socapex 419 compatible; OUT: 6 x powerCON® TRUE1® TOP	1028858
CPTM-H1-T6	IN: 1 x Harting E16; OUT: 6 x powerCON® TRUE1® TOP	1028228
CPTM-S1-T12	IN: 1 x Socapex 419 compatible; OUT: 6 x powerCON® TRUE1® TOP	1028849

Power Turtle Xtreme Outdoor (XO) CPVT7RT



CPVT7RT



Power Turtle Xtreme Outdoor (XO) is a compact distribution solution for mobile outdoor applications. Rugged EASYLEN® housing is ideally suited for outdoor usage and demanding applications under harsh conditions.

- **Extreme robust EASYLEN® housing** (high IK) with leather grain texture
- Flame retardant (UL94-V2) and non-conductive housing material
- **Additional connector protection** positioning NEUTRIK® powerCON® TRUE1® TOP and protruding housing tiles
- **Highly reliable** NEUTRIK® powerCON® TRUE1® TOP recepticals for In, Out and Daisy chaining
- **High outdoor protection** (IP65)
- Light weight, compact and stackable housing design

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CPVT7RT	IN: powerCON® TRUE1® TOP - OUT: 7 x powerCON® TRUE1® TOP, IP65	1027451

Power Strip Xtreme Outdoor (XO) CPVT3RD/6RD

Power Strip Xtreme Outdoor (XO) is a compact distribution solution for mobile outdoor applications. Rugged EASYLEN® housing is ideally suited for outdoor usage and demanding applications under harsh conditions.

- Extreme robust and safe EASYLEN® housing with leather grain texture
- Highly reliable NEUTRIK® powerCON® TRUE1® TOP recepticals for In, Out and Daisy chaining
- Flame retardant (UL94-V2) and non-conductive housing material
- Light weight and compact and stackable housing design
- High outdoor protection (IP65, IK, ..)
- Versatile mounting options



CPVT3RD



CPVT6RD



PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
CPVT3RD	IN: 1 x powerCON® TRUE1® TOP - OUT: 3 x powerCON® TRUE1® TOP, IP65	1027452
CPVT6RD	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x powerCON® TRUE1® TOP, IP65	1027453

Power Turtle & Strip Xtreme Outdoor (XO) CPVT*-M



CPVT7RT-M



CPVT6RD-M

XO



Power Strip & Power Turtle Meter are compact power distribution solutions featuring protected and lit meter display. They are ideally suited to outdoor usage and demanding mobile applications where simple voltage and current monitoring is required.

- Extreme robust and safe EASYLEN® housing with leather grain texture
- Highly reliable NEUTRIK® powerCON® TRUE1® TOP recepticals for In, Out and Daisy chaining
- Flame retardant (UL94-V2) and non-conductive housing material
- High outdoor protection (IP65, IK, ..)
- Meter with protected and lit voltage and current consumption display
- Light weight, compact and stackable housing design
- Versatile mounting options

Protected and lit power meter display allowing voltage and current consumption monitoring.

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CPVT6RD-M	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x powerCON® TRUE1® TOP – Power Meter	1035587
CPVT7RT-M	IN: 1 x powerCON® TRUE1® TOP - OUT: 7 x powerCON® TRUE1® TOP – Power Meter	1029197

Power Strip Xtreme Outdoor (XO) CPPS*RD

Power Strip Xtreme Outdoor (XO) is a compact distribution solution for mobile applications. Rugged EASYLEN® housing is ideally suited for demanding applications under harsh conditions.

- High reliable NEUTRIK® powerCON® TRUE1® TOP recepticals for IN and daisy chaining, Mains receptacles Schuko Type E/F
- High outdoor protection (IP54, IK, ..)
- Versatile mounting options
- Flame retardant (UL94-V2) and non-conductive housing material
- Light weight, compact and stackable housing design



CPPSE3RD-TT



CPPSE6RD-TT



PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CPPSF3RD-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 3 x Schuko Type F, IP54	1027449
CPPSF6RD-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x Schuko Type F, IP54	1027450
CPPSE3RD-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 3 x Schuko Type E, IP54	1027604
CPPSE6RD-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x Schuko Type E, IP54	1027605

Power Strip Xtreme Outdoor (XO) CCV5RD*



CCV5RD-6T1-2C



CCV5RD-6T1-C

XO

Power Strip Xtreme Outdoor (XO) is a compact distribution solution for mobile outdoor applications. Rugged EASYLEN® housing is ideally suited for outdoor usage and demanding applications under harsh conditions.

- Extreme robust and safe EASYLEN® housing with leather grain texture
- Flame retardant (UL94-V2) and non-conductive housing material
- Light weight, compact and stackable housing design
- Mains receptacles CEE16A IN & daisy chaining and highly reliable NEUTRIK® powerCON® TRUE1® TOP OUT
- High outdoor protection (IP65, IK, ..)
- Versatile mounting options

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CCV5RD-6T1-C	IN: 1 x CEE16A - OUT: 6 x powerCON® TRUE1® TOP, IP65	1027454
CCV5RD-6T1-2C	IN: 1 x CEE16A In & daisy chaining - OUT: 6 x powerCON® TRUE1® TOP, IP65	1027455

Power Strip CPPS*

Power Strip is a reliable power distribution solution for indoor applications.

- Highly reliable NEUTRIK® powerCON® recepticals for In and daisy chaining
- Several mounting options
- Light weight, compact housing




CPPSF6-TT



CPPSF3-TT

PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
CPPSF3-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 3 x Schuko type F, IP20	1027441
CPPSF6-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x Schuko type F, 1 x powerCON® TRUE1® TOP	1027442
CPPSE3-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 3 x Schuko Type E, IP20	1027596
CPPSE6-TT	IN: 1 x powerCON® TRUE1® TOP - OUT: 6 x Schuko type E, 1 x powerCON® TRUE1® TOP	1027597

Power Rack Xtreme CPR*

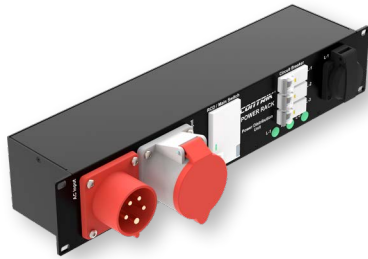

CPR16-C2-T6F1-CB



CPR32-C2-F9-CB



Power Rack Xtreme is a powerful and highly reliable distribution solution for installation in the 19" Rack. It is ideally suited for amplifier rack wiring applications.

- **Highly reliable** NEUTRIK® powerCON® TRUE1® TOP receptacles for Out
- **Circuit protection** with residual current device (RCCB) and miniature circuit breakers (MCB)
- **High-quality electrical and electronic component** from the renowned brands
- **High-quality assembly in EU**
- Attractive price / value ratio

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CPR16-C2-T6F1-CB	Front: IN: 1 x CEE16A; Daisy chain 1 x CEE16A; OUT 1 x Schuko Type F; Circuit protection: 1 x RCCB, 3 x MCB; Back: OUT: 6 x powerCON® TRUE1® TOP	1028799
CPR16-C2-F7-CB	Front: IN: 1 x CEE16A; Daisy chain 1 x CEE16A; OUT 1 x Schuko Type F; Circuit protection: 1 x RCCB, 3 x MCB; Back: OUT: 6 x Schuko Type F	1028797
CPR32-C2-T6F3-CB	Front: IN: 1 x CEE32A; Daisy chain 1 x CEE32A; 3 x Schuko Type F; Circuit protection: 3 x MCB; Back: OUT: 6 x powerCON® TRUE1® TOP	1029171
CPR32-C2-F9-CB	Front: IN: 1 x CEE32A; Daisy chain 1 x CEE32A; OUT 3 x Schuko Type F; Circuit protection: 1 x RCCB, 3 x MCB; Back: OUT: 6 x Schuko Type F	1029170
CPR32-C2-F7-CB	Front: IN: 1 x CEE32A; Daisy chain 1 x CEE32A; OUT: 1 x Schuko Type F; Circuit protection: 1 x RCCB, 3 x MCB; Back: OUT 6 x Schuko Type F	1028798

Trussclips

CCL*

Trussclip set 75 mm for pipe 48 mm / 1½". For cPOT Strip and Power Strips X/XO.

- Safe mounting with counterforce design
- Developed for fast mounting and fixing
- Fits for all elongated Power Strip X / XO products
- Flame retardant EASYLEN® material (UL94 V2)



CCL75-P2



CCL90-P2

PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
CCL75-P2	Truss clip for 48 mm pipe (1½") and 75 mm cPot Strip / Power Strip XO as 2 pcs pack	1027380
CCL90-P2	Truss clip for 48 mm pipe (1½") and 90 mm cPot Strip / Power Strip XO as 2 pcs pack	1027563

SUPERIOUR QUALITY AND RELIABILITY

POWER CABLES

powerCON® TRUE1® assembled extension cords NKPH*-A2A1-*

NEUTRIK® outdoor cables with powerCON® TRUE1® TOP and high quality H07RN cable. Ideally suited for stages and events.

- Flexible elastomer insulation and sheath
- Oil resistant
- Flame retardant cable according to IEC / EN 60332-1-2
- Connectors with Breaking Capacity (CBC)
- Flame retardant connector according to UL94 V-0
- IP65 and enclosure type 4 rated when intermated with NEUTRIK® powerCON® TRUE1® TOP



NKPH03-A2A1-M0010

PRODUCT VARIATIONS		
Art-No.	Details	Order-No.
NKPH03-A2A1-M0100	1 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027564
NKPH03-A2A1-M0200	2 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027565
NKPH03-A2A1-M0500	5 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027566
NKPH03-A2A1-M1000	10 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027567
NKPH03-A2A1-M1500	15 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027568
NKPH03-A2A1-M2000	20 m 3 x 1.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027569
NKPH04-A2A1-M0100	1 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027570
NKPH04-A2A1-M0200	2 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027571
NKPH04-A2A1-M0500	5 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027572
NKPH04-A2A1-M1000	10 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027573
NKPH04-A2A1-M1500	15 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027574
NKPH04-A2A1-M2000	20 m 3 x 2.5 mm ² H07RN powerCON® TRUE1® TOP (m) (f) IP65	1027575

powerCON® assembled Schuko cords NKPHx-AxAx



NKPH04-MFA1-M0200

NEUTRIK® cables with molded Schuko mains plug to powerCON® and high quality H07RN cable. Ideally suited for stages and events.

- Flexible elastomer insulation and sheath
- Oil resistant
- Flame retardant cable according to IEC / EN 60332-1-2
- Connectors with Breaking Capacity (CBC)
- Flame retardant connector according to UL94 V-0
- IP65 and enclosure type 4 rated when intermated with NEUTRIK® powerCON® TRUE1® TOP


PRODUCT VARIATIONS

Art-No.	Details	Order-No.
NKPH01-MFA1-M0150	1.5 m 3 x 1.5 mm ² H07RN Schuko „E+F“ (m) powerCON® (f)	1027576
NKPH02-MFA1-M0150	1.5 m 3 x 2.5 mm ² H07RN Schuko „E+F“ (m) powerCON® (f)	1027577
NKPH02-A1MF-M0150	1.5 m 3 x 2.5 mm ² H07RN powerCON® (m) Schuko (f)	1027578

CONTRIK® power multicore cables CKPE50-AHAH*

Norm conform, highly flexible cables with the reduced weight. Power multicore cables allow reduction of the cabling effort and cost. This cables are ideally suited for outdoor usage and demanding mobile applications.

- **Perfect handling** due to flexibility at low temperatures
- **Norm conform** multicore cables for the event technics (DIN 15765)
- **Reduced weight** due to optimized cable diameter




PRODUCT VARIATIONS			
Art-No.	Details		Order-No.
CKPE50- AHAH-M050	Cable: Power multicore 13 x 2.5 mm ² black, Connector 1: Harting E16 female,	5	1029172
CKPE50-AHAH-M100	Connector 2: Harting E16 male.	10	1029173
CKPE50-AHAH-M200	Harting female and male E16 plugs with housing and screw connection	20	1029174
CKPE50-AHAH-M300	in black, according to DIN 15765:2019-09, performance class 2, type D,	30	1029175
CKPE50-AHAH-M400	connector 5, configuration 2A.	40	1029176

CONTRIK® power multicore cables CKPE50-ASAS*



CKPE50-ASAS-M50



Socapex 419

Norm conform, highly flexible cables with the reduced weight. Power multicore cables allow reduction of the cabling effort and cost. This cables are ideally suited for outdoor usage and demanding mobile applications.


- **Perfect handling** due to flexibility at low temperatures
- **Norm conform** multicore cables for the event technics (DIN 15765)
- **Reduced weight** due to optimized cable diameter

PRODUCT VARIATIONS

Art-No.	Details		Order-No.
CKPE50-ASAS-M050	Cable: Power multicore 13 x 2.5 mm ² black	5	1029177
CKPE50-ASAS-M100	Connector: 1: Socapex 419 female compatible, connector 2: Socapex 419 male compatible.	10	1029178
CKPE50-ASAS-M200		20	1029179
CKPE50-ASAS-M300	Shrink tubing on both sides for your own labeling.	30	1029180
CKPE50-ASAS-M400		40	1029181


APPLICATION

Power Strip with Schuko socket

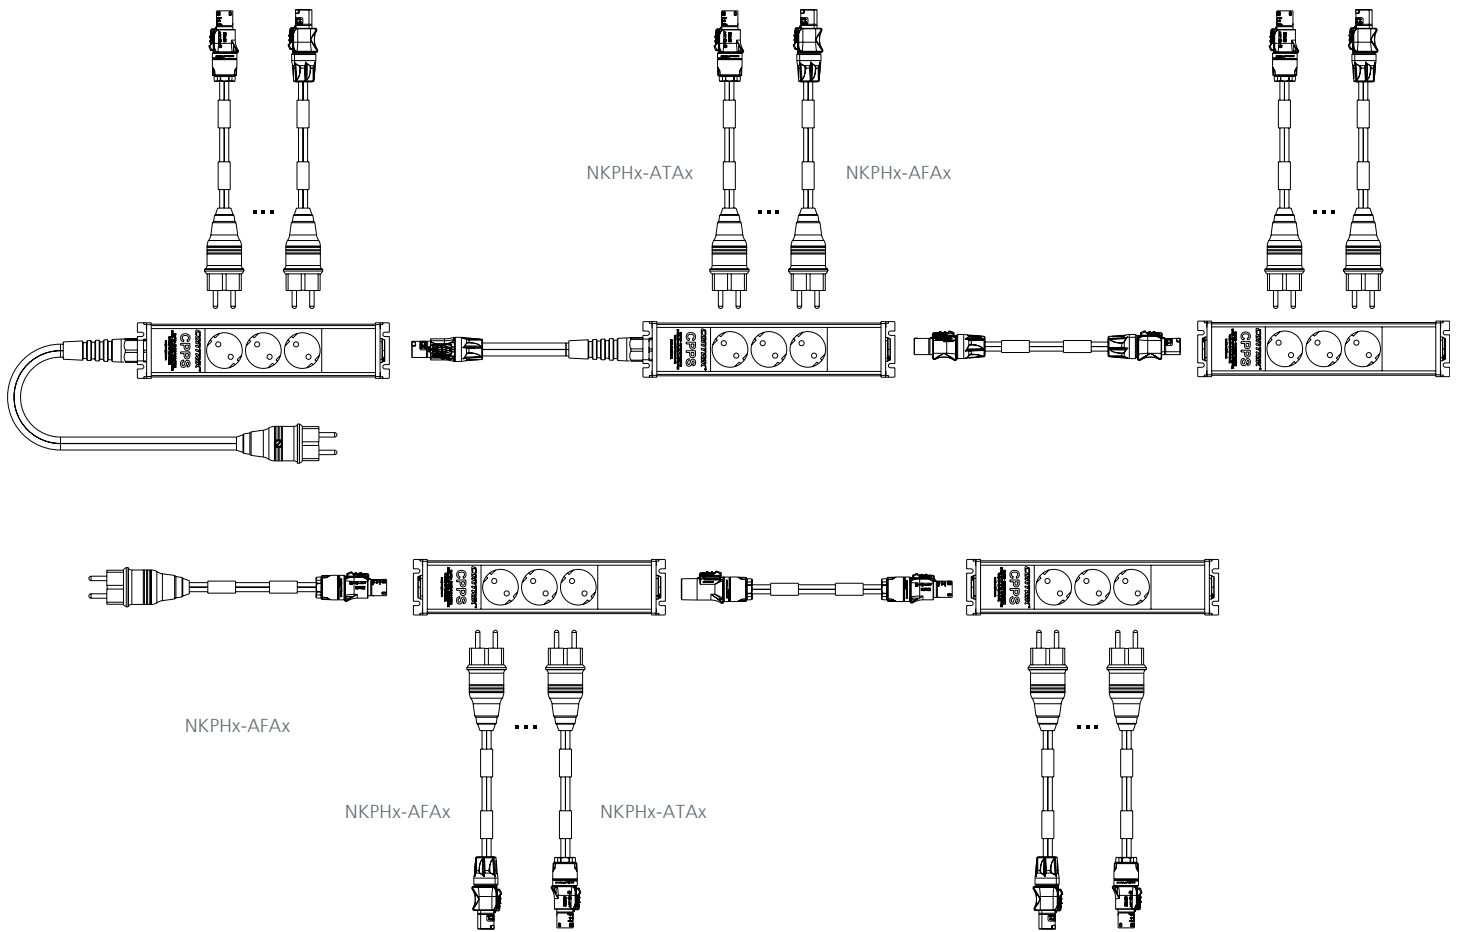


Application / Connection scheme

Power Strip Xtreme Outdoor (XO)

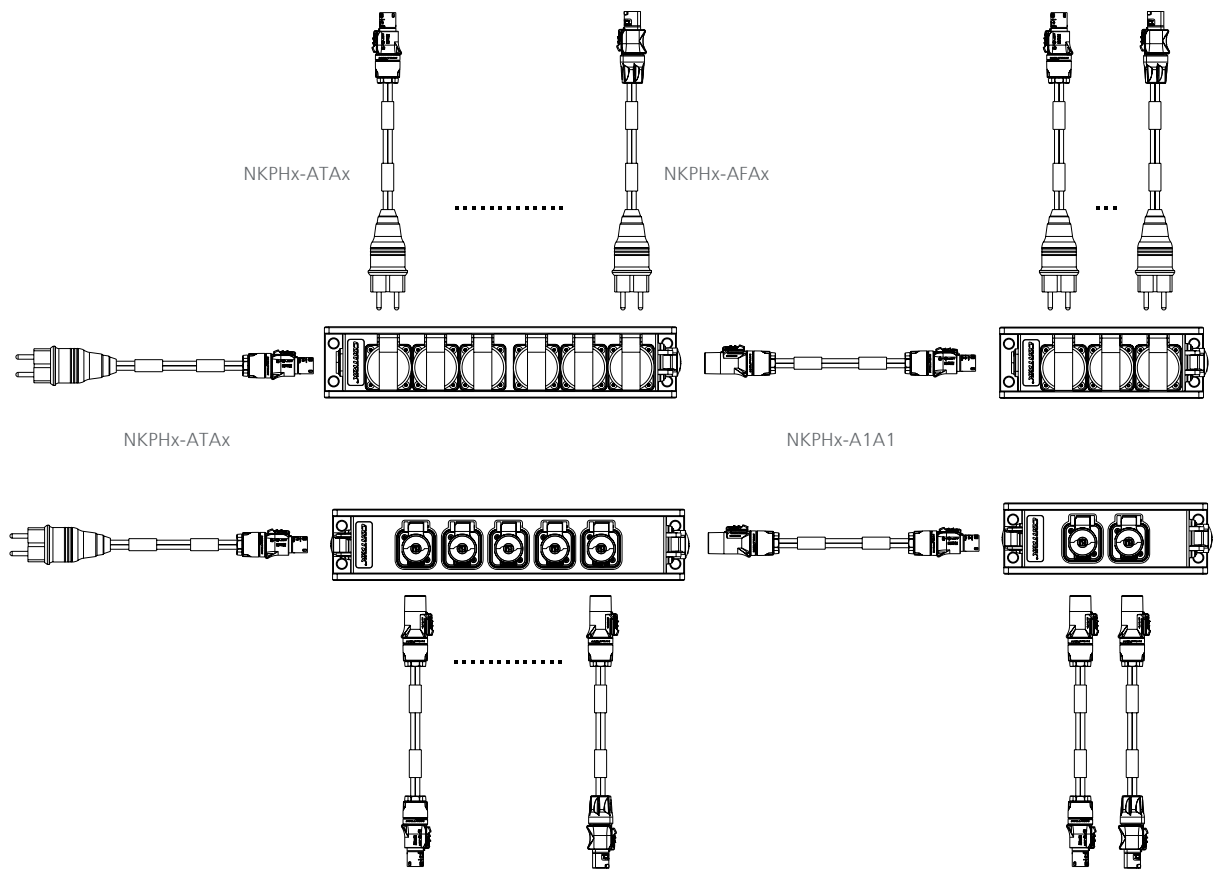

Application / Connection scheme


Power Turtle Xtreme Outdoor (XO)

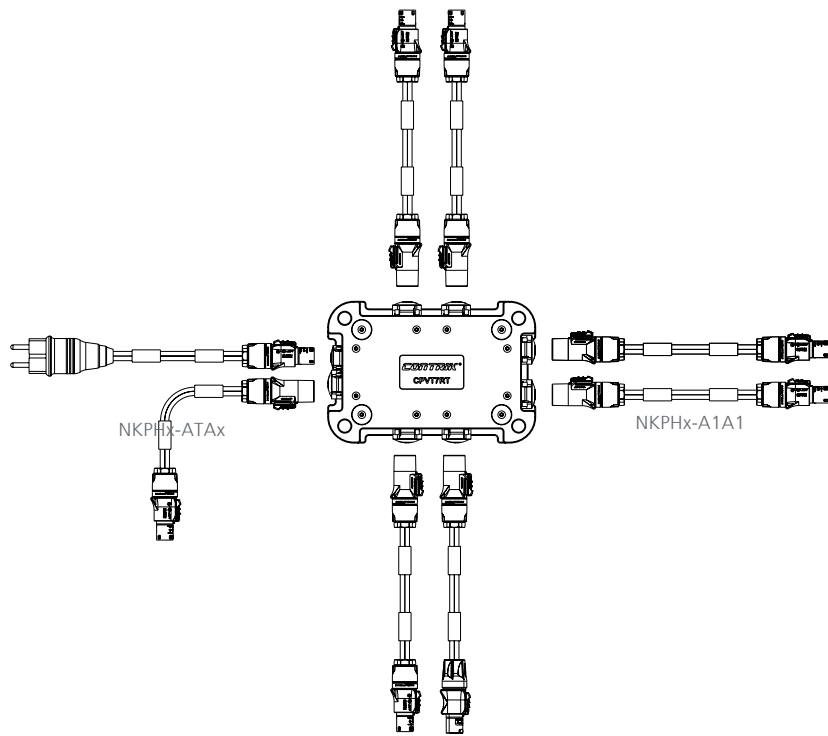


NKPHx-A1A2

Application

Power Strip Xtreme Outdoor (XO) with 3-phase CEE Input

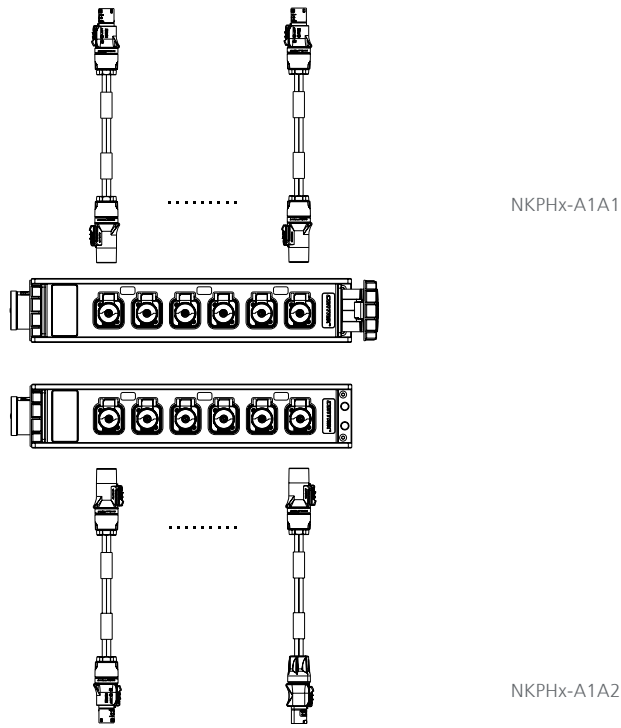

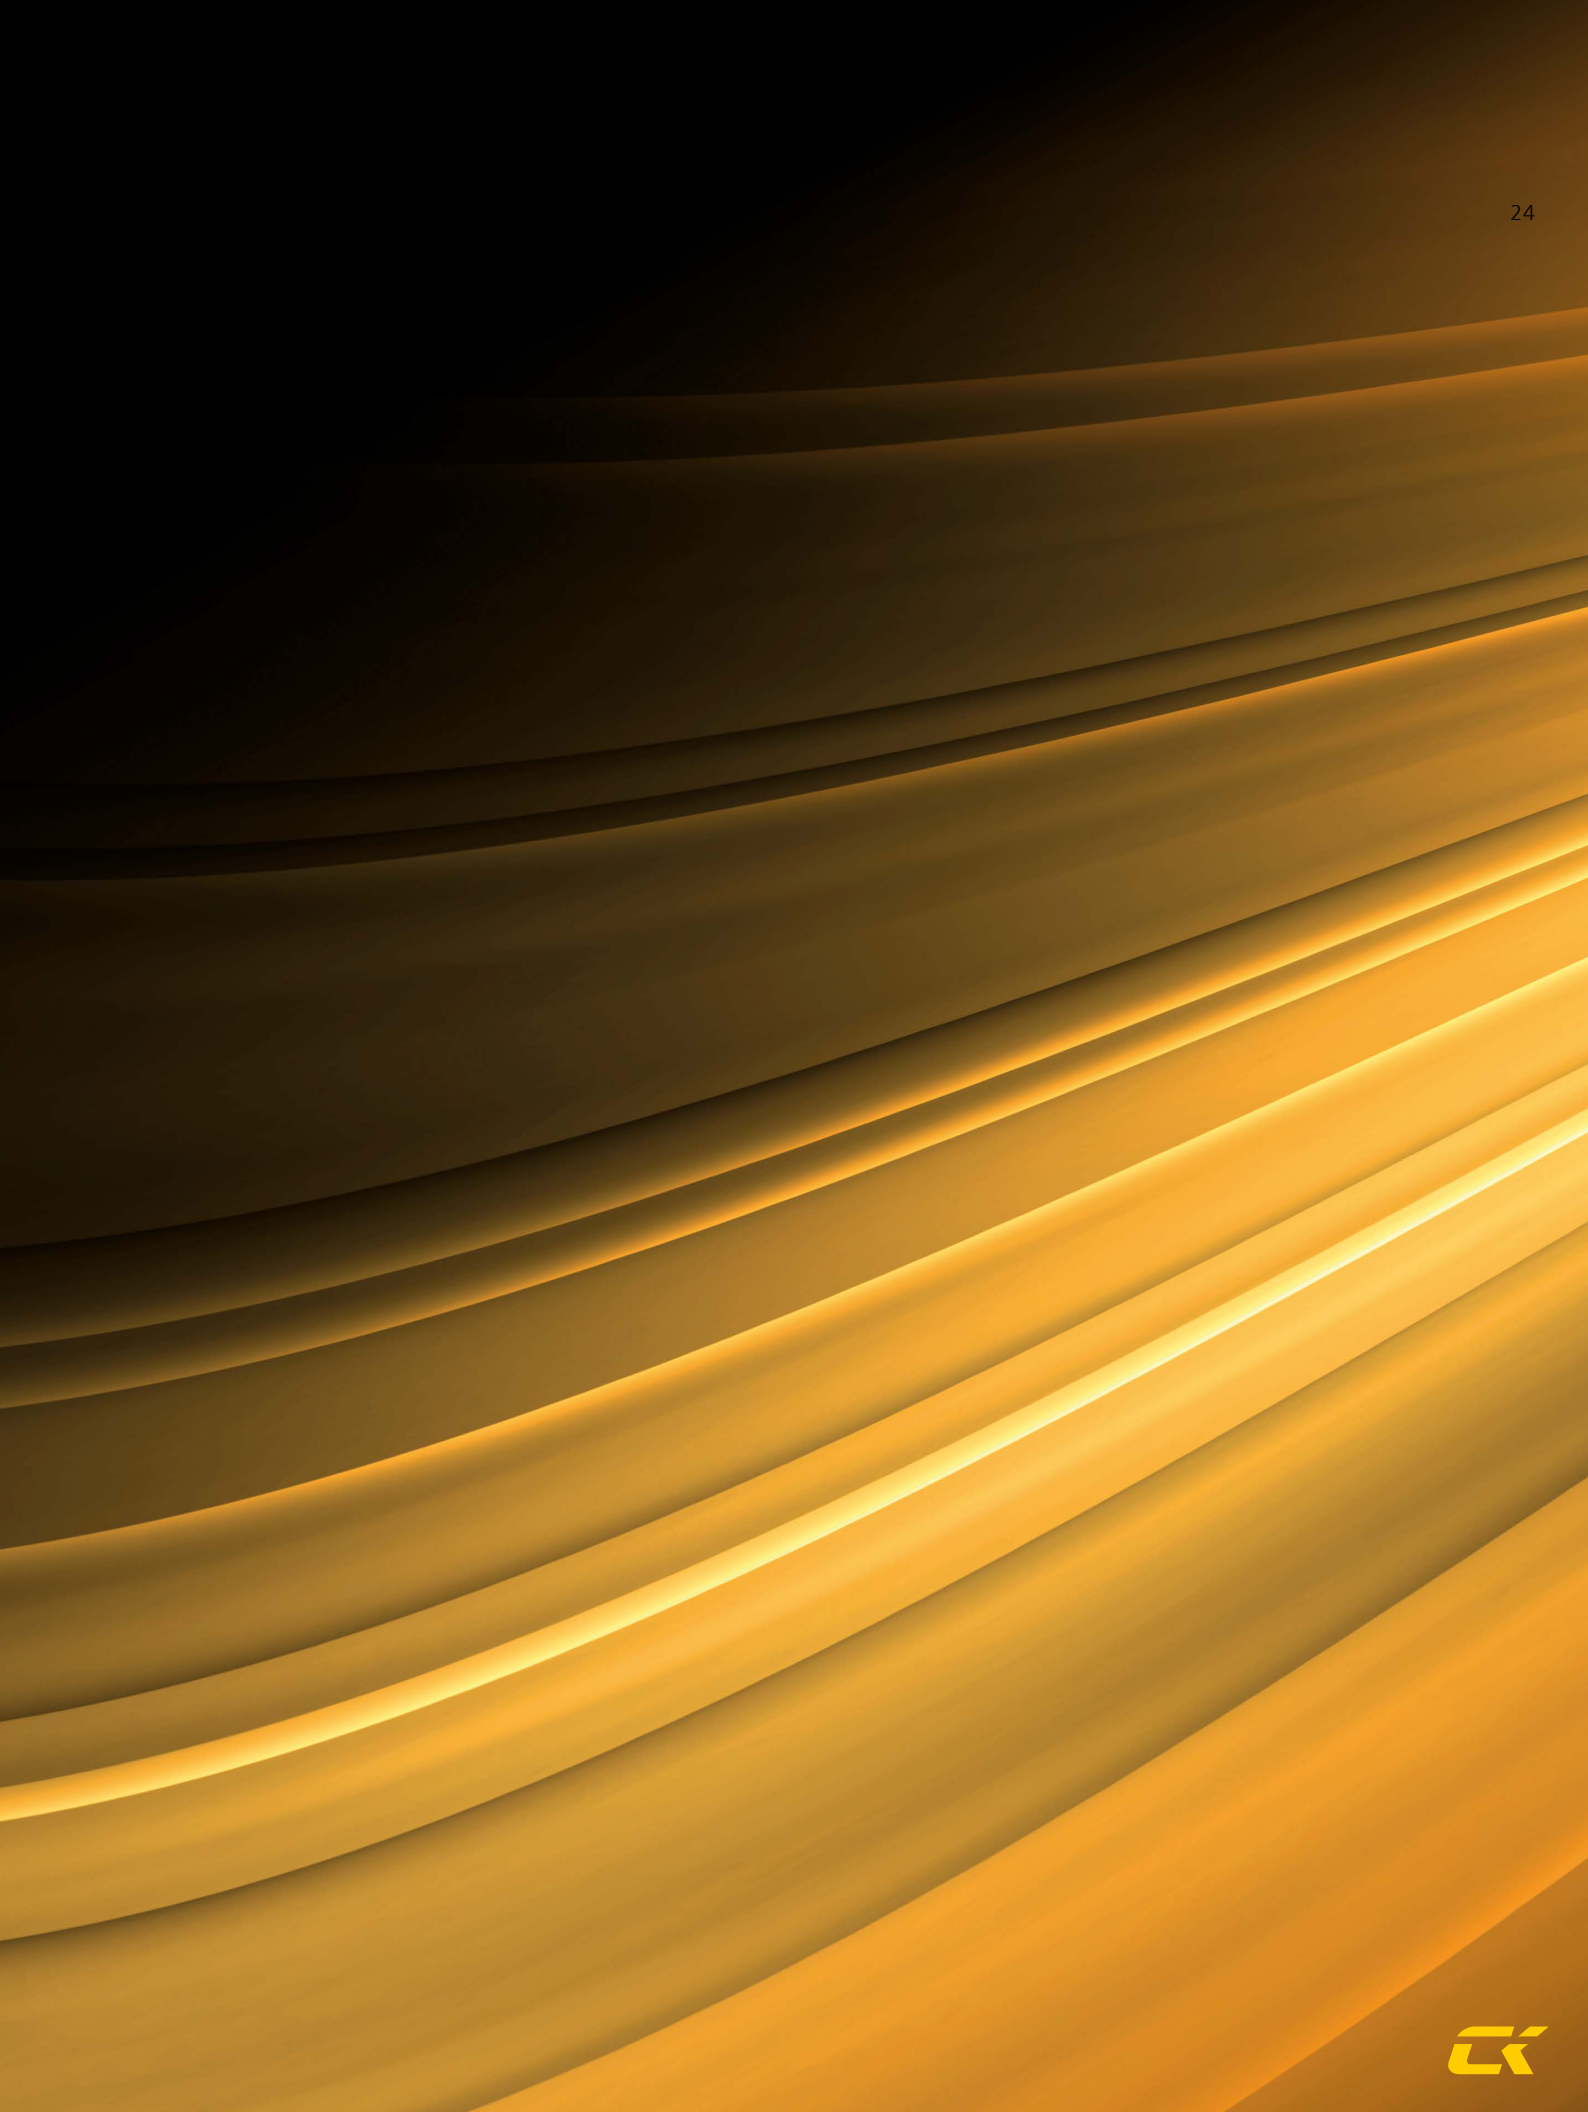

SUPERIOUR QUALITY AND RELIABILITY

Equipotential Bonding System cPot


cPot distribution boxes

The cPot Strip and Turtle are a compact ruggedized distribution box for mobile grounding / potential equalization applications. Rugged EASYLEN® housing is ideally suited for outdoor usage and demanding applications under harsh conditions.

- Extreme robust and safe EASYLEN® housing with leather grain texture
- Flame retardant (UL94-V2) and non-conductive housing material
- High outdoor protection (IP54, high IK, ..),
- Light weight and compact housing design
- Versatile mounting options
- Long edges to protect the cPot plugs
- Stainless steel screws
- M10 thread at the bottom



CP-BV6-R



CP-BVB5-R




CP-FV6-RT

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CP-BV6-R	6 x cPot [m] powerBOX	1027377
CP-BVB5-R	5 x cPot [m] to M8 stainless steel bolt powerBOX	1027379
CP-FV6-RT	6 x cPot [m] with holes for ground nail	1027381

cPot components & accessories



CP-LTFA



CP-HTCY



CP-PMA



CP-CMM

Components & accessories for the cPot product range like clips.

CP-LT: cPot connector kits is a solution for field assembly / field repair of female and male connectors.

CP-HTC: cPot safety clip is an accessory protecting the cPot connector from being unlocked without special tools. According to the normative requirements unlocking must be possible only with special tools.

CP-PM: cPot recessed male connector is a solution for the integration of the cPot receptacle into the device enclosure or panel.

CP-CMM: cPot coupler / spooky is a solution for the extension of the cPot ready-made cables.

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CP-LTFA	Cable female PE axial 10-25 mm ² $\varnothing=7,5-14$ mm IP65	1027369
CP-LTMA	Cable male PE axial 10-25 mm ² $\varnothing=7,5-14$ mm IP65	1027372
CP-HTF	Cable male PE axial 10-25 mm ² $\varnothing=7,5-14$ mm IP65	1028484
CP-HTCY	Safety clips for yellow housing (PU=10)	1027370
CP-HTCR	Safety clips for red housing (PU=10)	1027371
CP-PMA	Panel male PE axial 10-25 mm ² IP65	1027373
CP-PMB	Panel male PE terminal block 2 x 35/1 x 25 mm ² IP65	1027374
CP-PM620	Panel male PE M6 x 20 mm IP65	1027375
CP-CMM	Coupler male male PE green IP65	1027376

cPot connection points

Components for the connection of the cPot equipotential bonding lines to different structures like truss, podium, walls, buildings grounding system, earth.

CP-APMB: cPot male wall connector is a solution for the grounding of the mobile installations to the building grounding system. Wall connector can be mounted on the wall or other surface.

CP-BSAM: cPot ribbon clip adapter is a grounding / potential equalization point for the non-standard pipes / bars / truss dimensions, incl. squared frames.


CP-ESP: Ground spike with cPot male connector – a solution for creating a mobile grounding point with cPot connector.

CP-CLAMP: Truss-clamp with cPot coupler is a grounding / potential equalization point for the truss structures. Truss-clamp with cPot coupler is a grounding / potential equalization point for the truss structures.

CP-PTP: Platform connection point with cPot coupler is a grounding / potential equalization point for the platform structures.



CP-APMB



CP-BSAM



CP-ESP



CP-CLAMP



CP-PTP

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CP-APMB-WH	Connection point mounted white 1 x cPot[m] 35/25 mm ²	1027383
CP-APMB-BK	Connection point mounted black 1 x cPot[m] 35/25 mm ²	1027384
CP-BSAM-50	Ribbon clip adapter 0.25 m PE with 1 x cPot[m] IP65 25 mm ²	1027387
CP-Clamp	cPot coupler to mount on truss-pipes and similar applications	1027382
CP-ESP1,5	Earth/Ground spike 1.5 m PE with 1 x cPot[m] male connector	1027386
CP-PTP-100	Platform connection point with cPot coupler	1027385

cPot ready-made cables CP-X*




CP-X16-001


cPot ready made cables are a lockable solution allowing fast and easy wiring of the cPot grounding system. Additional locking clips are removable by tool only according to the DIN 15700.

- Ready made female – female lockable cable assembly
- Easy cable length adjustment (for example, for conduit installation) due to demountable connector / axial screwed contact
- Connector with locking clips are removable by tool only according to the DIN 15700.
- High quality rubber cable H07RN-F with 16 mm² and 25 mm² conductor cross-section
- Extendable with cPot coupler (CP-MM)
- Easy mating / unmating connector in gloves

PRODUCT VARIATIONS

Art-No.	Details	Order-No.
CP-X16-001	Cable 1 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027356
CP-X16-002	Cable 2 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027357
CP-X16-005	Cable 5 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027358
CP-X16-010	Cable 10 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027359
CP-X16-015	Cable 15 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027360
CP-X16-020	Cable 20 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027361
CP-X16-025	Cable 25 m cPot [f] cPot [f] 16 mm ² H07RN-F1X	1027362
CP-X25-010	Cable 10 m cPot [f] cPot [f] 25 mm ² H07RN-F1X	1027363
CP-X25-025	Cable 25 m cPot [f] cPot [f] 25 mm ² H07RN-F1X	1027364
CP-X25-050	Cable 50 m cPot [f] cPot [f] 25 mm ² H07RN-F1X	1027365
CP-X25-R8M-00025	Cable 0,25 m eyelet M8 cPot [m] 25 mm ² H07RN-F1X	1027366
CP-X25-R12M-00025	Cable 0,25 m eyelet M12 cPot [m] 25 mm ² H07RN-F1X	1027367
CP-X25-R12F-00025	Cable 0,25 m eyelet M12 cPot [f] 25 mm ² H07RN-F1X	1027368

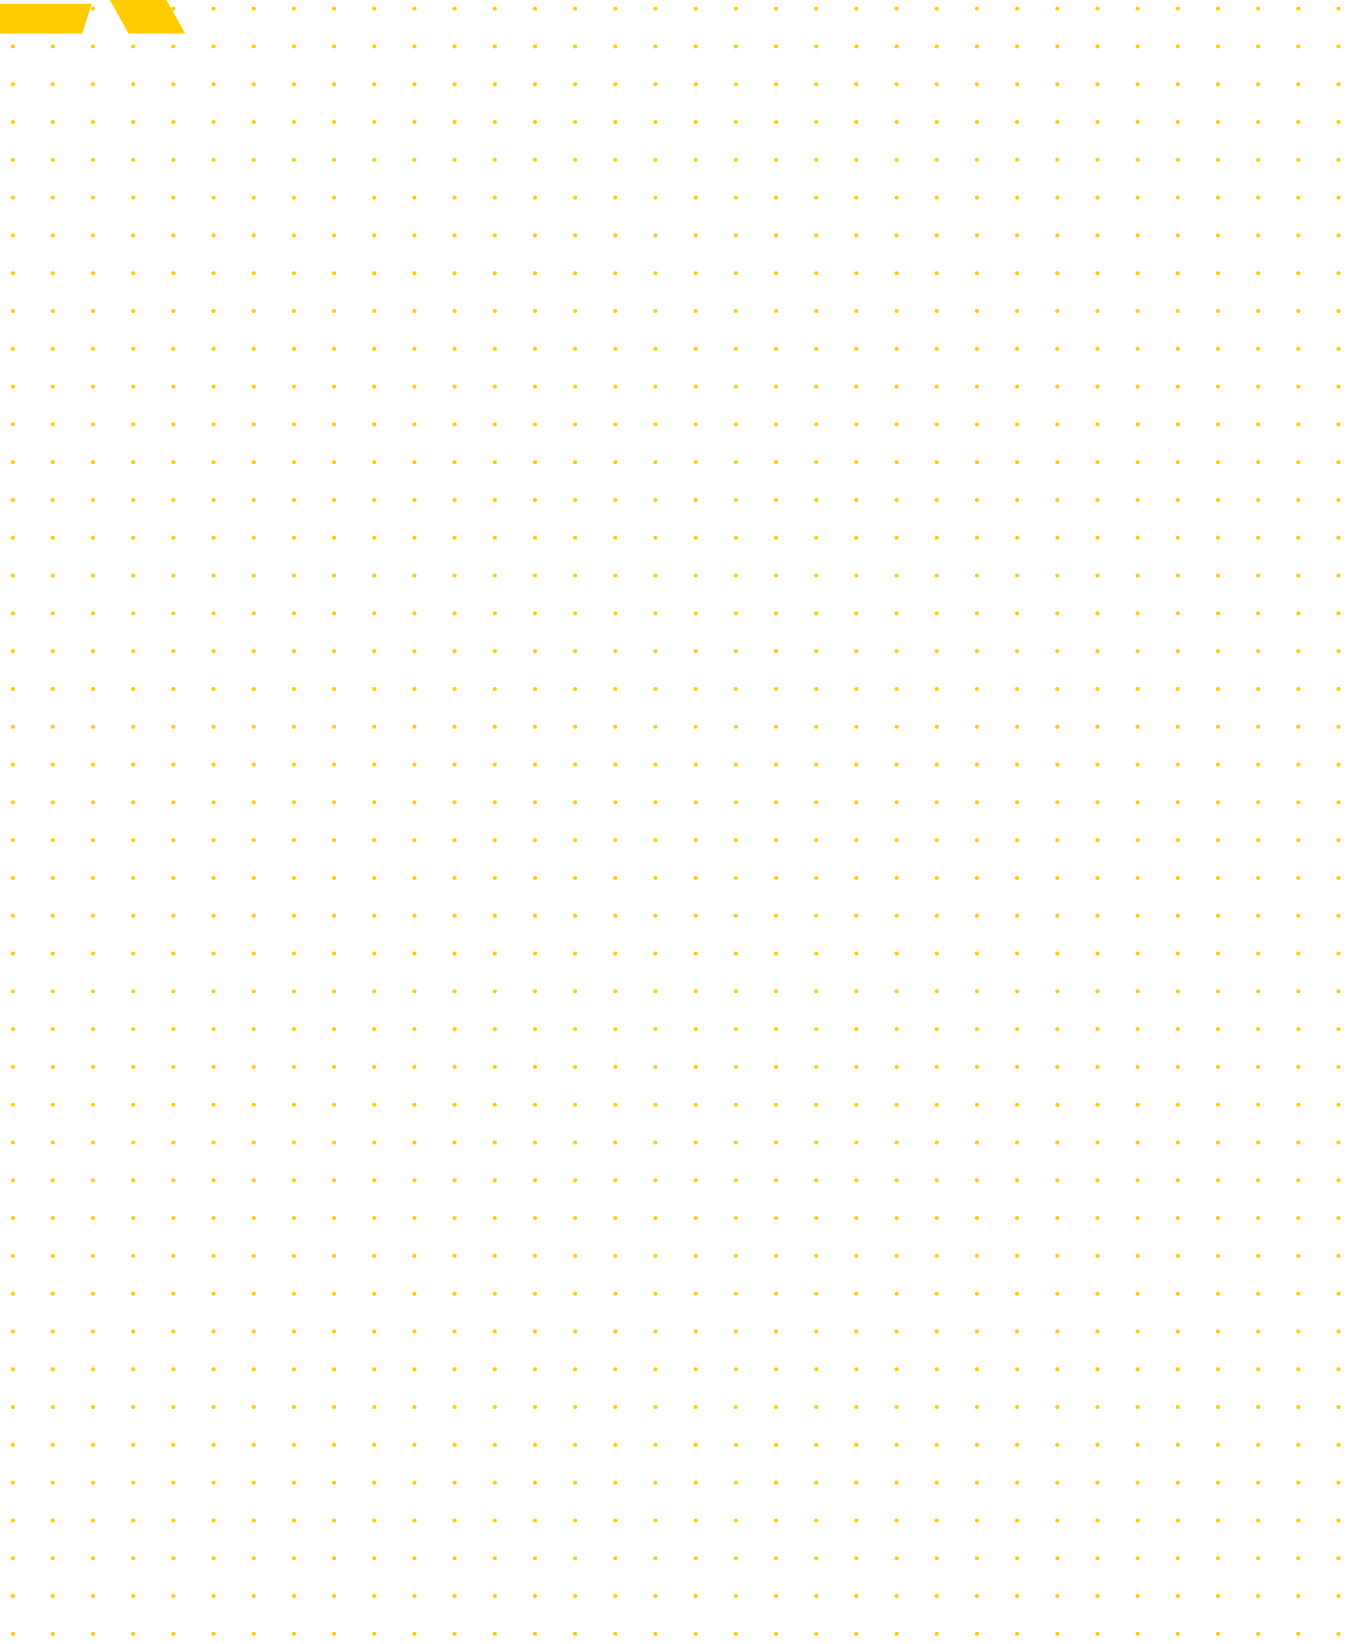

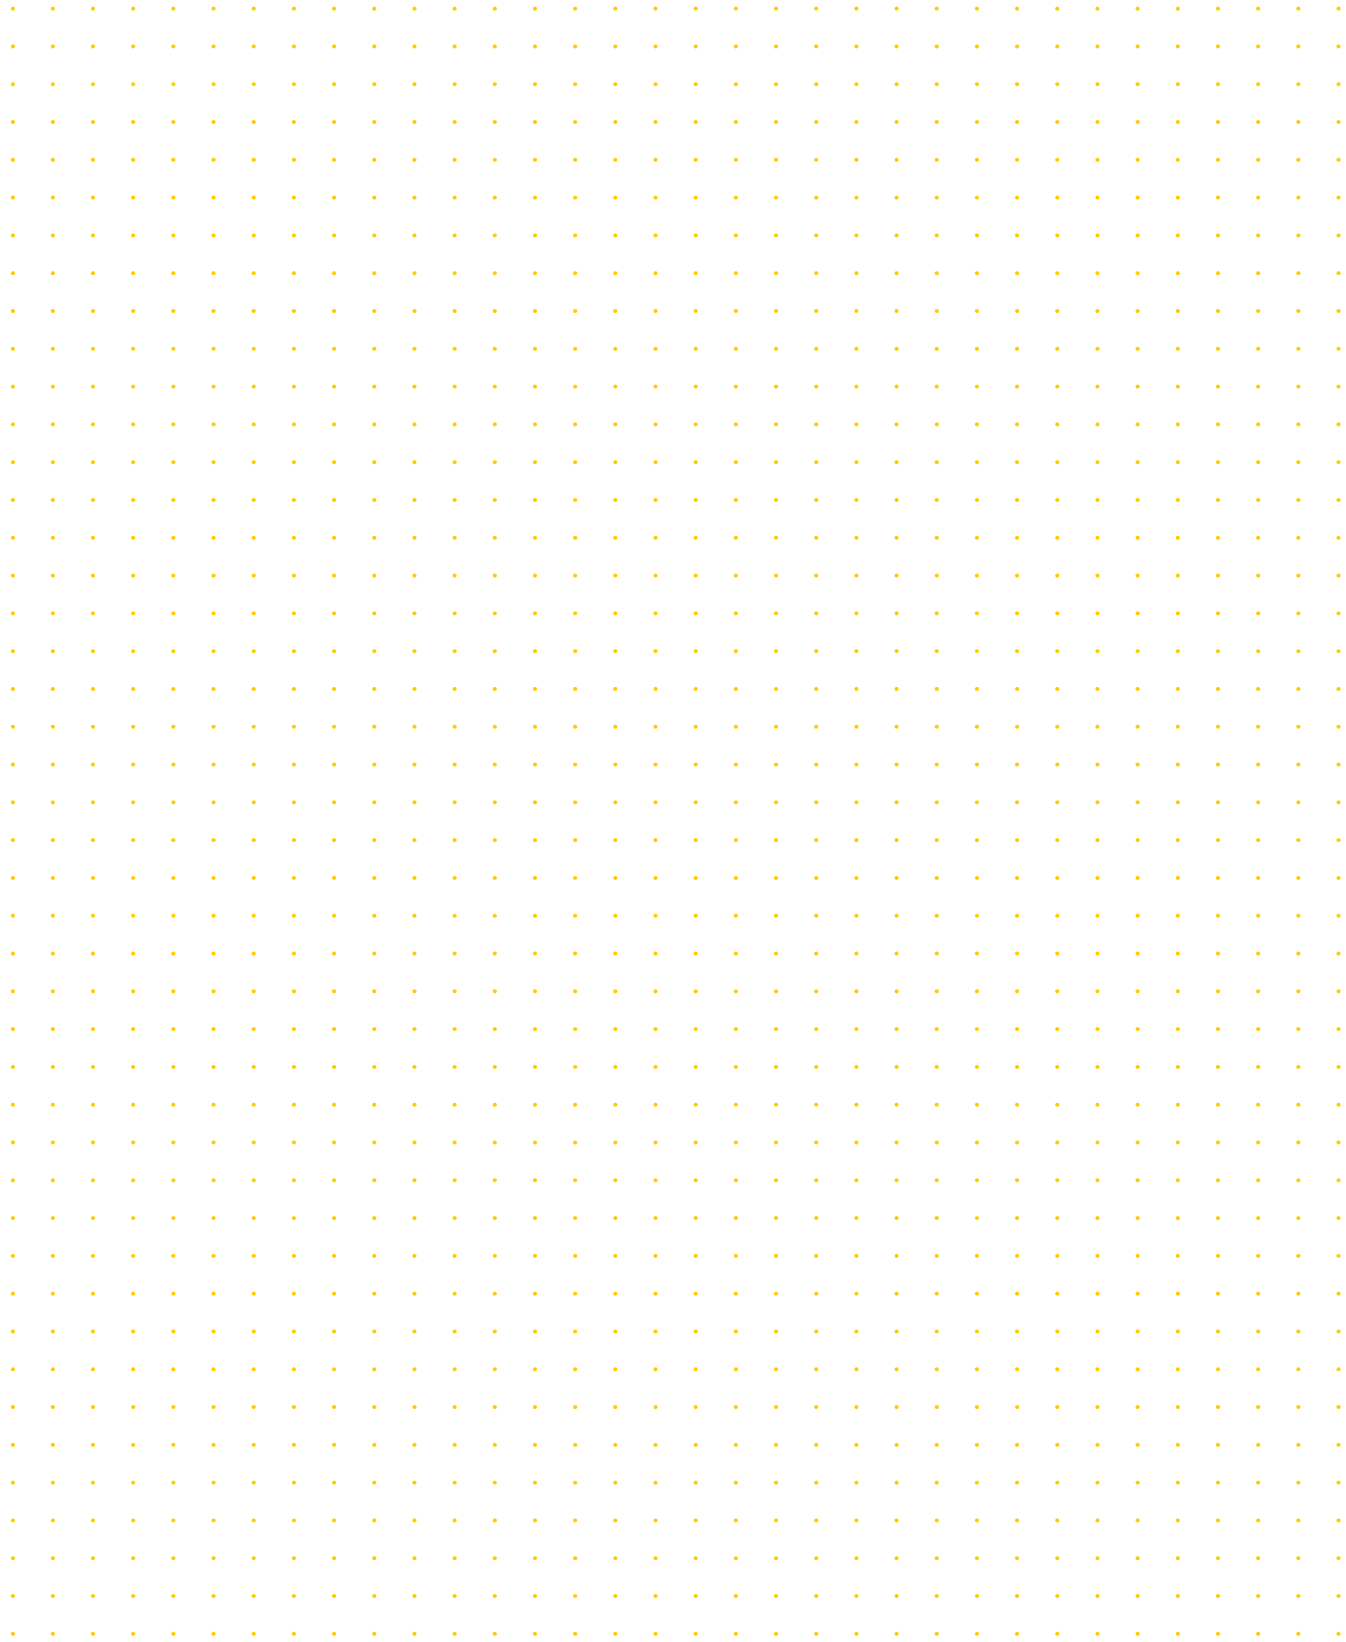



SUPERIOR RELIABILITY AND SAFETY

LIECHTENSTEIN (HEADQUARTERS)

Neutrik AG, Im alten Riet 143,
9494 Schaan, Liechtenstein
T +423 237 24 24, F +423 232 53 93, neutrik@neutrikgroup.com

USA

Neutrik USA Inc., 4115 Taggart Creek Road,
Charlotte, North Carolina, 28208
T +1 704 972 30 50, info@neutrikusa.com

GERMANY / NETHERLANDS / DENMARK / AUSTRIA

Neutrik Vertriebs GmbH, Felix-Wankel-Strasse 1,
85221 Dachau, Germany
T +49 8131 28 08 90, neutrik@neutrikgroup.de

FRANCE

Neutrik© France, 52 Rue d'agueseau,
92100 Boulogne
T +33 1 41 31 67 50, info@neutrikgroup.fr

GREAT BRITAIN

Neutrik (UK) Ltd., Westridge Business Park, Cothey Way Ryde,
Isle of Wight PO33 1 QT
T +44 1983 811 441, sales@neutrikgroup.co.uk

JAPAN

Neutrik Limited, Yusen-Higashinonbashi-Ekimaie Bldg., 3-7-19
Higashinonbashi, Chuo-ku, Tokyo 103
T +81 3 3663 47 33, mail@neutrik.co.jp

CHINA

Ningbo Neutrik Trading Co., Ltd., Shiqi Street,
Yinxian Road West
Fengjia Villiage, Hai Shu District, Ningbo, Zhejiang, 315153
T +86 574 88250833, sales@neutrik.com.cn

HONG KONG

Neutrik Hong Kong LTD., Suite 18,
7th Floor Shatin Galleria Fotan, Shatin
T +852 2687 6055, sales@neutrik.com.hk

CONTRIK Product Catalog - NF33 V5- 2023/07 – Data subject to change without prior notice. © 2023 Neutrik AG.



www.contrik.com