


RUBBER LINE CUBE4 Distribution Box

DESIGNED AND BUILT TO SATISFY THE CUSTOMERS' SPECIFIC NEEDS IN ACCORDANCE WITH THE I.E.C. REGULATIONS

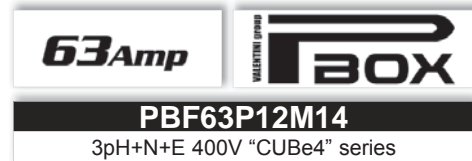

REAR (incoming & outgoing)
 1 C-FORM 63amp 5p 6h 400V IP67 (IN)
 12 x C-FORM 16amp 3p 6h 230V IP44 (OUT)

FRONT (protection devices)
 1 MCB 63amp 4p-C 6.000A (MAIN).
 12 x RCBO 16amp 1pN-C 4.500A IΔn 0,03A AC type
 (12 x C-FORM 16amp single-phase)
 Nominal data: IEC 61439-1 & 2, Ue=400V 3pH+N+E, fn=50Hz, InA=63amp, Icc=6.000A, IP=44, RDF=98%



REAR (incoming & outgoing)
 1 C-FORM 63amp 5p 6h 400V IP67 (IN)
 3 x SCHUKO 16amp 3p 230V IP54 (OUT)
 2 x C-FORM 32amp 3p 6h 230V IP44 (OUT)
 1 C-FORM 16amp 5p 6h 400V IP44 (OUT)
 1 C-FORM 32amp 5p 6h 400V IP44 (OUT)
 1 C-FORM 63amp 5p 6h 400V IP67 (OUT)

FRONT (protection devices)
 1 MCB 63amp 4p-C 6.000A (MAIN)
 3 x RCBO 16amp 1pN-C 4.500A IΔn 30mA AC class
 (3 x SCHUKO 16amp)
 2 x RCBO 32amp 1pN-C 4.500A IΔn 30mA AC class
 (2 x C-FORM 32amp single-phase)
 1 RCBO 16amp 4p-C 6.000A IΔn 30mA AC class
 (1 C-FORM 16amp three-phase)
 1 RCBO 32amp 4p-C 6.000A IΔn 30mA AC class
 (1 C-FORM 32amp three-phase)
 1 RCBO 63amp 4p-C 6.000A IΔn 300mA AC class
 (1 C-FORM 63amp three-phase)
 Nominal data: IEC 61439-1 & 2, Ue=400V 3pH+N+E, fn=50Hz, InA=63amp, Icc=6.000A, IP=44, RDF=39%



CUBE4 Distribution Box RUBBER LINE

DESIGNED AND BUILT TO SATISFY THE CUSTOMERS' SPECIFIC NEEDS IN ACCORDANCE WITH THE I.E.C. REGULATIONS




REAR (incoming & outgoing)

- 1 C-FORM 63amp 5p 6h 400V IP67 (IN)
- 4 x SYNTAX® SSX 19p IP67 (OUT; Socapex 419 compatible)

FRONT (protection devices & instrumentation)

- 1 MCB 63amp 4p-C 6.000A (MAIN)
- 4 x RCCB 40amp 4p IΔn 0,03A AC type + 24 x MCB 16amp 1pN-C 4.500A (4 x SYNTAX® SSX 19p)

Nominal data: IEC 61439-1 & 2, Ue=400V 3pH+N+E, fn=50Hz, InA=63amp, Icc=6.000A, IP=54, RDF=50%

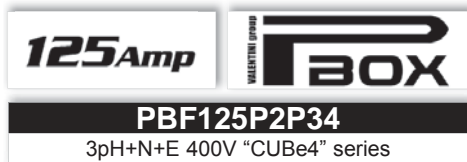

REAR (incoming & outgoing)

- 1 C-FORM 125amp 5p 6h 400V IP67 (IN)
- 2 x C-FORM 63amp 5p 6h 400V IP67 (OUT)

FRONT (protection devices & instrumentation)

- 1 MCB 125amp 4p-C 10.000A (MAIN)
- 2 x RCBO 63amp 4p-C IΔn 0,3A AC type (2 x C-FORM 63amp three-phase)

Nominal data: IEC 61439-1 & 2, Ue=400V 3pH+N+E, fn=50Hz, InA=125amp, Icc=6.000A, IP=54, RDF=98%

NOTES

| | |
|------|----------------------------------|
| RCD | Residual Current Device |
| MCB | Miniature Circuit Breaker |
| RCBO | Residual Current Circuit Breaker |
| * | socapex 419 compatible |