


article#	4435-6
article description	CEE-flanged socket sloping (120x130) 125A 3p 6h IP67 Pilot POWER TWIST
description long	CEE-flanged socket sloping (120x130) 125A 3p 6h IP67 Pilot POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 6h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 120x130 mm / 100x108 mm with pilot contact sleeve IP protection class: IP66/IP67
GTIN (EAN)	9003399201295
country of origin	AT
customs number	85366990
net weight	0.866 kg
packaging quantity	2
minimum order quantity	2



ETIM 9.0	EC001317
IEC-amperage	125 A
Voltage according to EN 60309-2	230 V (50+60 Hz) blue
Number of poles	3
Clock hour position	6 h
Identification colour	Blue
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	130 mm
Drill hole distance vertical	108 mm
Flange size horizontal	120 mm
Drill hole distance horizontal	100 mm

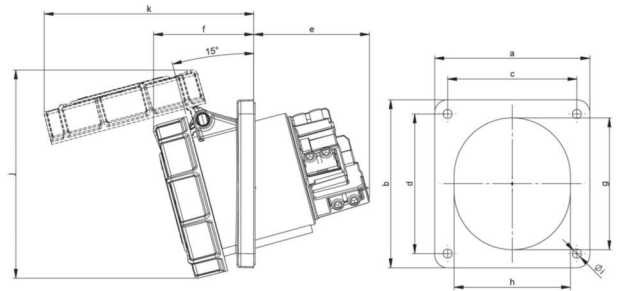

a	120 mm
b	130 mm
c	100 mm
d	108 mm
e	92 mm
f	77 mm
g	102 mm
h	90 mm
i	7 mm
j	160 mm
k	162 mm
wire flexible	16-50 / 1-2,5 (Pilotkontakt) mm ²
wire solid	16-70 / 1-4 (Pilotkontakt) mm ²
contact screws	450 / 100 (Pilotkontakt) Ncm
dismantling length	100 mm
stripping length	24-27 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C



<https://www.pcelectric.at/shop/en/?func=detail&artnr=4435-6>

