


article#	967011355
article description	<b>PRCD-S+ inline 16A 230V 30mA IP55</b>
description long	Mobile personal protection device PRCD-S+ 16A 250V~; I $\Delta$ N = 30mA Protection degree IP55 Housing grey /black /red PE conductor circuit is switched on in advance and switched off with a delay. Terminal cross section: 1-2,5mm <sup>2</sup> according DIN VDE 0661 DGUV Information 203-006 (former BGI/GUV-I 608)
GTIN (EAN)	9003399306570
country of origin	SI
customs number	85362010
net weight	0.330 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC000003
Number of poles	3
Rated voltage	230 V
Rated current	16 A
Rated fault current	0.03 A
Mounting method	Cable
Leakage current type	Other
Frequency	50 Hz
Degree of protection (IP)	IP55
Connectable conductor cross section multi-wired	1 – 2.5

IK-code *)	IK09
------------	------



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

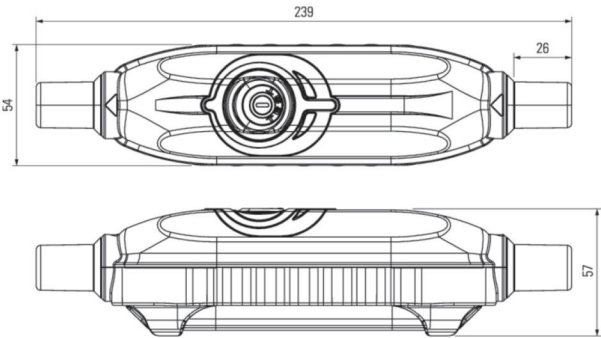

<https://www.pcelectric.at/shop/en/?func=detail&artnr=967011355>

